



New Guard Coatings Group

A global reputation to protect.


The information herewith is given with the best of New Guard Coatings Group knowledge.

Rights are reserved to change and update the data without notice.

This information is not exhaustive and it is the user's responsibility to ensure that this data sheet is the most current by contacting their local New Guard Coatings Group branch prior to using the coating/product.

www.newguardcoatings.com

NORTH • SOUTH EAST • MIDLANDS • NORTH WEST • HULL • SCOTLAND



Fosroc® Hydrocell XL

Cross linked, non-absorbent, closed cell, polyethylene joint filler

Uses

Hydrocell XL is a cross linked, non-absorbent, semi-rigid, cellular polyethylene joint filler used for forming expansion joints in concrete, brickwork and blockwork. The product provides excellent support to sealants subject to hydrostatic pressure and is particularly recommended for water retaining or water excluding structures.

- Potable water reservoirs
- Culverts and canals
- Sewage tanks
- Roadways and hardstandings
- Retaining walls
- Basement structures and subways
- Runways, taxiways and aprons

Advantages

- Cross linked to resist lateral and hydrostatic pressure
- High density support of sealant to prevent adhesion failure
- Non-absorbent closed cell structure
- High compression recovery
- Non-extruding
- Low load transfer to joint edges
- Non-tainting and rot proof
- Chemically resistant
- Bitumen free
- Natural bond breaker

Description

Hydrocell XL is a cross linked, semi-rigid, closed cell polyethylene sheet material used for forming or filling expansion joints between adjacent in-situ or precast components. Hydrocell XL provides excellent support backing to elastomeric sealants and is especially recommended for use in expansion joints in brickwork and in the construction of water retaining and water excluding structures.

Standards compliance

DTp Specification for Highway Works, February 2016, Series 1000, Clause 1015.

BS 5628, Part 3: Code of Practice for the Use of Masonry.

The compressive strength of Hydrocell XL prevents the transfer of load across movement joints.

Each cell is cross linked thereby preventing breakdown under hydrostatic pressure. The closed cell formation prevents the absorption of water.

Specification clauses

The joint filler shall be cross linked, non-absorbent, semi-rigid, cellular polyethylene. It shall have a recovery of 98% after 50% compression and a compressive strength of 0.15 N/mm² when tested in accordance with ASTM D3575. It shall have a water absorption of less than 0.05% by volume when tested in accordance with ASTM D3575 and be resistant to weathering and chemical attack.


Properties

Property	Test method	Typical values
Recovery:	ASTM D3575 compression	98% after 50%
Compressive strength:	ASTM D3575	0.15 N/mm ²
Water absorption:	ASTM D3575	Less than 0.05% by volume
Weathering test:	DTp Clause 1015	No disintegration
Chemical resistance:		Excellent resistance to acids, alkalis, oxidising agents and biological degradation

Compression loading

The load compression curve shown below gives typical compression values achieved in accordance with ASTM D3575.

Typical load/compression curve

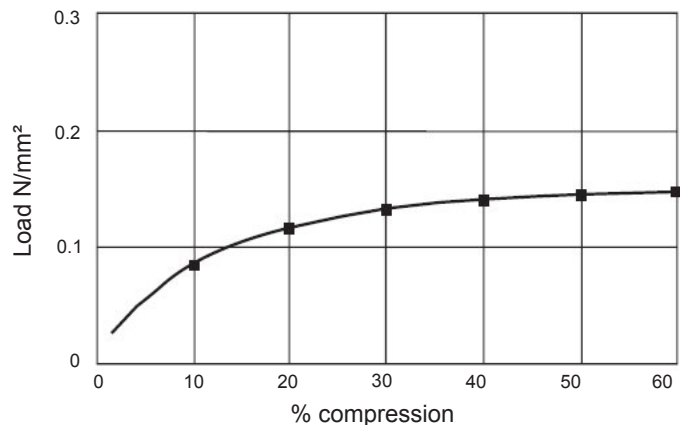

Fosroc® Hydrocell XL

Application instructions

Joint sealing slots

When forming expansion joints with Hydrocell XL in in-situ concrete, joint sealing slots can be readily formed in the following manner.

Before installing, simply cut off a strip to the required depth. Pin the strip back by using 50 mm nails at approximately 100 mm intervals. Then install the filler flush with the finished surface.

Prior to sealing, the top strip can then be pulled easily from the joint to provide an uncontaminated sealing slot ready for preparation and sealing.

As elastomeric sealants will not bond to Hydrocell XL the additional need for bond breaker strips is eliminated.

Estimating

Hydrocell XL is supplied in the following sheet sizes and can be easily cut to the required size with a Stanley knife or saw.

10 mm x 1000 mm x 2000 mm
15 mm x 1000 mm x 2000 mm
20 mm x 1000 mm x 2000 mm
25 mm x 1000 mm x 2000 mm

For details of other thicknesses, contact Fosroc.

Limitations

Hydrocell XL should not be used when the operational temperature is continuously below -70°C or above 100°C.

Storage

Hydrocell XL should be stored in original unopened packaging, in cool dry conditions, away from sunlight.

Precautions

Health and safety

There are no known health hazards associated with Hydrocell XL in normal use.

Fosroc and Hydrocell are trademarks of
Fosroc International Limited



Important note

Fosroc products are guaranteed against defective materials and manufacture and are sold subject to its standard Conditions for the Supply of Goods and Services, copies of which may be obtained on request. Whilst Fosroc endeavours to ensure that any advice, recommendation, specification of information it may give is accurate and correct, it cannot, because it has no direct or continuous control over where or how its products are applied, accept any liability either directly or indirectly arising from the use of its products, whether or not in accordance with any advice, specification, recommendation of information given by it. All Fosroc datasheets are updated on a regular basis. It is the user's responsibility to obtain the latest version.

Fosroc Limited

Drayton Manor Business Park
Coleshill Road, Tamworth,
Staffordshire B78 3TL. UK

www.fosroc.com

telephone:
+44 (0) 1827 262222

fax:
+44 (0) 1827 262444

email:
enquiryuk@fosroc.com



Certificate number FM 610